


HPLC ELSD Method for Analysis Butyrylcholine on Obelisc R Column

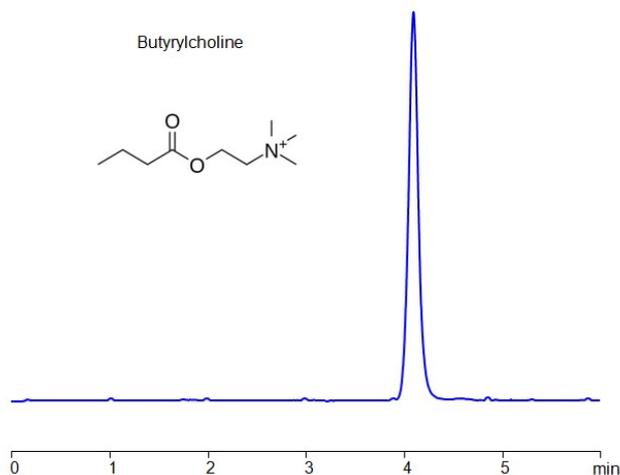

Column: Obelisc R
Column size: 2.1 × 100 mm, 5 µm
Column part number: OR-21.100.0510
Mobile phase: MeCN/H₂O – 70/30%
Buffer: Ammonium formate – pH 3.0 – 2 mM
Flow rate: 1.0 mL/min
Detection: ELSD, the nebulizer and evaporator temperatures 50°C, with a gas flow rate of 1.6 Standard Liters per Minute (SLM)

Butyrylcholine can be retained and analyzed using an Obelisc R mixed-mode stationary phase column. The analysis employs an isocratic method with a simple mobile phase consisting of water, acetonitrile (MeCN), and ammonium formate as a buffer. Detection is achieved using ELSD

Method Parameters

Column	Obelisc R, 2.1 x 100 mm, 5 µm, 100 Å, dual ended
Mobile Phase	MeCN/H ₂ O – 70/30%
Buffer	Ammonium formate pH 3.0 – 2 mM
Flow Rate	0.2 mL/min
Detection	ELSD, the nebulizer and evaporator temperatures 50°C, with a gas flow rate of 1.6 Standard Liters per Minute (SLM)
Injection Volume	1 µl

Quelle: <https://sielc.com/hplc-method-for-analysis-butyrylcholine>