


## HPLC Method for Analysis of Fluoroacetic acid, Difluoroacetic acid and Trifluoroacetic acid on BIST A+ Column

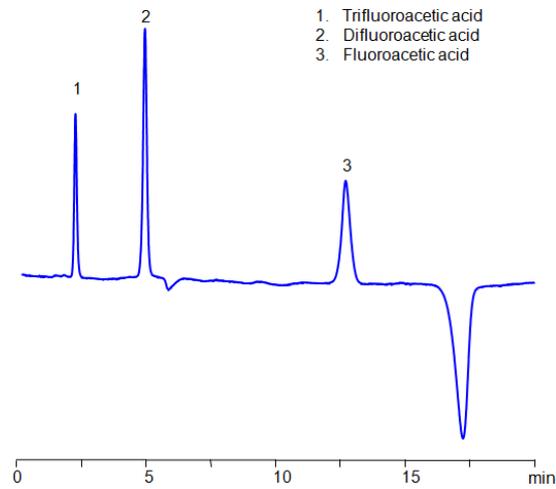

<b>Column:</b>	BIST A +
<b>Column size:</b>	2.1 × 100 mm, 3 µm
<b>Column part number:</b>	TAP-21.100.0310
<b>Mobile phase:</b>	MeCN - 90%
<b>Buffer:</b>	TMDAP formate - 5 mM pH 4.0
<b>Flow rate:</b>	0.4 mL/min
<b>Detection:</b>	Conductivity

### Method Parameters

<b>Column</b>	BIST A+, 2.1×100 mm, 3 µm, 100 Å
<b>Mobile Phase</b>	MeCN – 90%
<b>Buffer</b>	TMDAP ( N,N,N',N'-Tetramethyl-1,3-diaminopropane) formate – 5 mM pH 4.0
<b>Flow Rate</b>	0.4 mL/min
<b>Detection</b>	Conductivity

Quelle: <https://sielc.com/hplc-method-for-analysis-of-fluoroacetic-acid-difluoroacetic-acid-and-trifluoroacetic-acid>