


## UV-Vis Spectrum of Fluorene

<https://sielc.com/uv-vis-spectrum-of-fluorene>

### Chromatogram

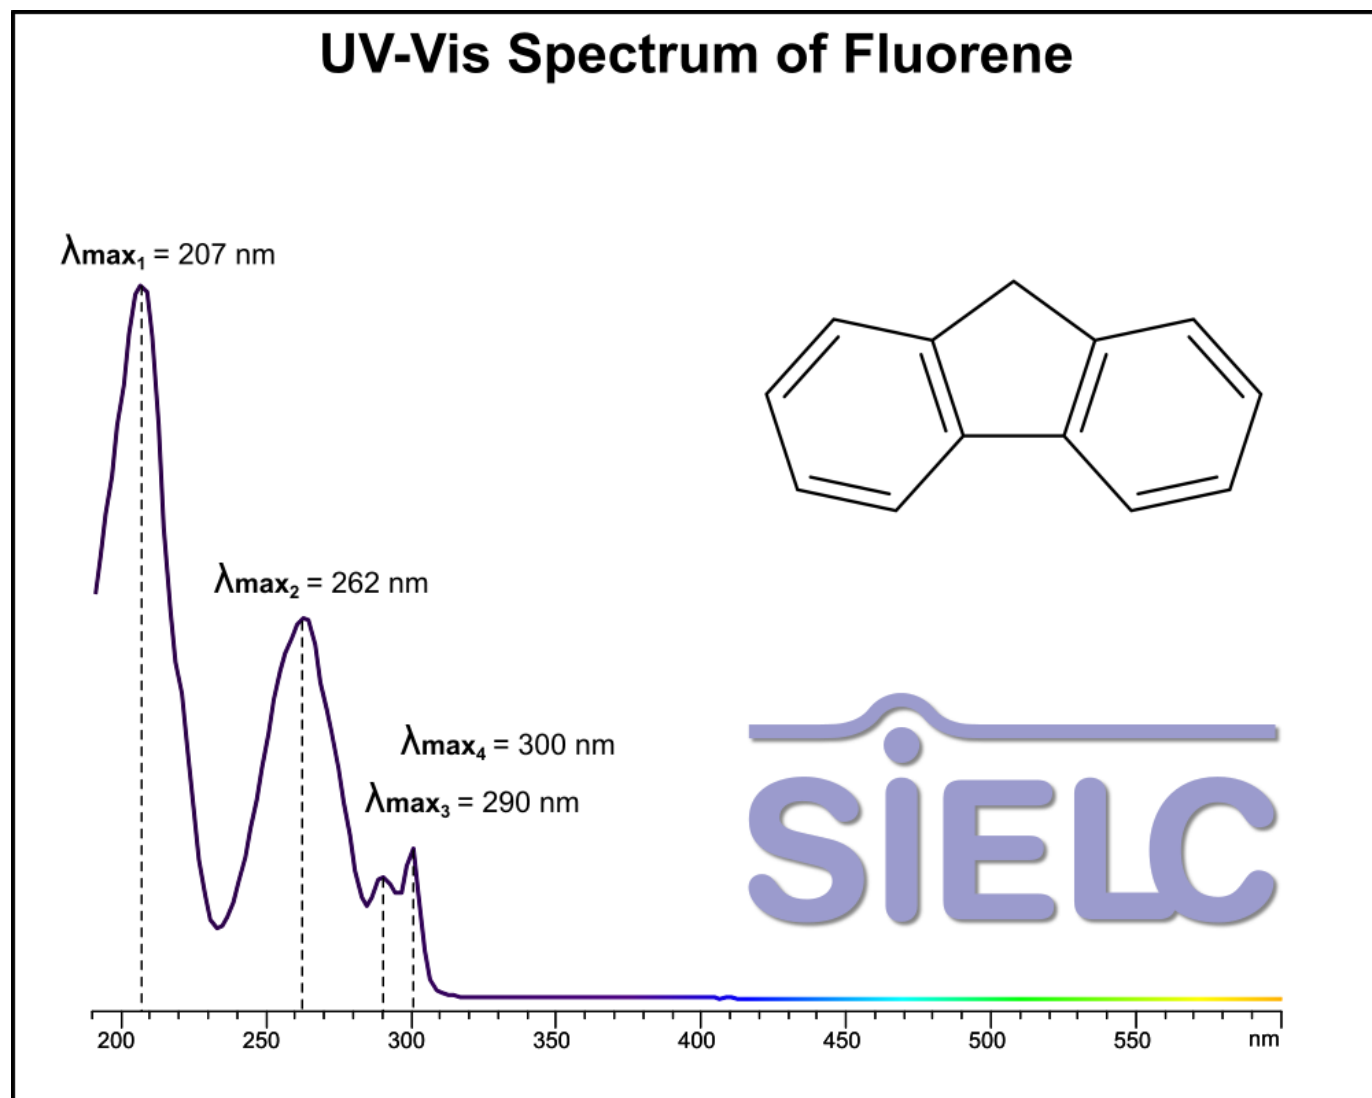

### Description

For optimal results in HPLC analysis, it is recommended to measure absorbance at a wavelength that matches the absorption maximum of the compound(s) being analyzed. The UV spectrum shown can assist in selecting an appropriate wavelength for your analysis. Please note that certain mobile phases and buffers may block wavelengths below 230 nm, rendering absorbance measurement at these wavelengths ineffective. If detection below 230 nm is required, it is recommended to use acetonitrile and water as low UV-transparent mobile phases, with phosphoric acid and its salts, sulfuric acid, and TFA as buffers. For some compounds, the UV-Vis Spectrum is affected by the pH of the mobile phase. The compound was dissolved with acetonitrile. This analysis was done with the mobile phase made of 20% acetonitrile and 80% water.